



Adjustable Paver Transport Cart VTK-V

For the effortless transportation of bound or loose pavers, kerb stones, slabs, etc.


- ▷ Clamping is done by bending a lever 90° (maximum pressure 15 kp).
- ▷ An integral protection device prevents overloading of the clamping mechanism.
- ▷ A favourable load distribution and the light-weight-nature of the device (68 kg) ensures optimal operating.
- ▷ Its narrow build (115 cm/45") means it can be used on the smallest building sites.

- ▷ Blocks can easily be loaded from the pallet without the need of a ramp.
- ▷ Fully mechanical
- ▷ Adjusts smoothly and without the need for tools.
- ▷ Adjustable gripping width from 550 mm – 1,050 mm.
- ▷ Durable galvanized surfaces.
- ▷ The minimum and maximum gripping widths can be altered using special grippers.

* NEW



Type	Gripping Width W mm (in)	Block Height max. E mm (in)	Gripper Length L mm (in)	Working Load Limit WLL kg (lbs)	Dead Weight kg (lbs)	Order-Number	
VTK-V [Ⓢ]	550 – 1,050 (21¾ – 41")	900 (35½")	200 (7¾")	400 (880)	68 (150)	5110.0004	
VTK-V with supporting wheel [Ⓢ]	technical data see above				74 (160)	5110.0010	
* VTK-V-AR	Access ramp for VTK-V, to make picking up interlocking paving stones on the pallet easier. L = 700 mm, W = 850 mm, H = 160 mm					10 (22)	5110.0014
Supporting wheel [Ⓢ]	for easy handling on even ground. Can be additionally attached at any time.				7 (15)	4110.0041	
Retrofit Kit: Special grippers and wider load support [Ⓢ]	max. 1,350 mm					4110.0056	
AT insertable storage tray [Ⓢ]	for transporting tools, small compactors, etc.				5 (11)	4110.0010	

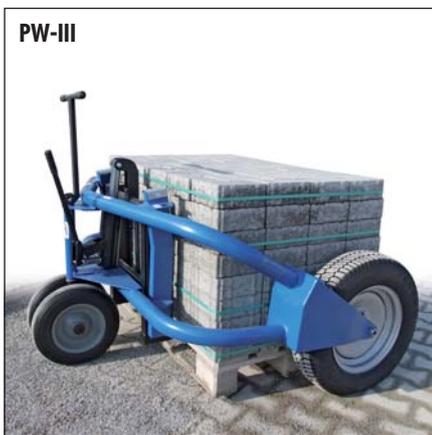

Pallet-Cart PW-III

For the transportation of palletized products on the building site.

- ▷ With large rubber wheels for easy movement.

- ▷ The fork ends are driven under the pallet, the two main wheels are then located on the pallet's left and right sides. The load is raised using the hand pump and hydraulic cylinder

Type	max. Pallet Length mm (in)	Distance between forks	Working Load Limit WLL kg (lbs)	Dead Weight kg (lbs)	Order-Number
PW-III	1,250 (49")	adjustable	1,500 (3,300)	195 (430)	5110.0011
Drawbar	Retrofit kit with braking function				4230.0038



Pallet-Cart PW-III-E

Pallet cart with electrical drive for easy transport of stone packs with pallets on the construction site.

- ▷ Powered by rechargeable battery with integrated charger.

- ▷ Drive motor 24 V / 500 W.
- ▷ Lifting hydraulics 24 V / 800 W.

Type	max. Pallet Length mm (in)	Distance between forks	Working Load Limit WLL kg (lbs)	Dead Weight kg (lbs)	Order-Number
PW-III-E	1,250 (49")	adjustable	1,200 (2,650)	226 (500)	5110.0012

Ⓢ Durable surface protection by galvanizing