

# INFRARED OIL HEATERS

## XL 61




Ventilation of the room is necessary to prevent a deficiency in oxygen supply.



**XL 61**

PATENTED

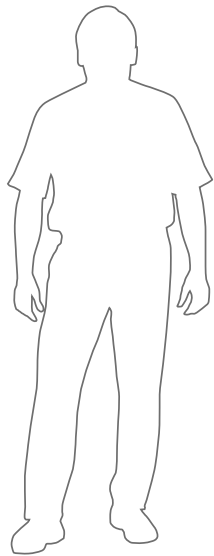

XL 61 WITH TROLLEY

- ▼ Low noise
- ▼ Infrared heating (short wave)
- ▼ No air flow
- ▼ Electronic flame control with photocell
- ▼ Post-ventilation
- ▼ Standard oil level indicator
- ▼ ILME socket for remote thermostat: analog or digital
- ▼ Suction filter and inlet filter
- ▼ Snorkel
- ▼ Overheat thermostat
- ▼ Anti-tilt switch



DISPLAY AND SOCKET FOR REMOTE THERMOSTAT

TO HEAT

### OPTIONAL ACCESSORIES:



**Trolley**  
4201.159



**Manometer**  
4201.187



**Room thermostat**  
TH5 with cable  
3 m - 4150.109  
10 m - 4150.112



**Digital thermostat**  
THD with 5 m cable  
4150.106

SPECIFICATIONS		XL 61
Heating power	kW	17
	Btu/h	58.000
	kcal/h	14.600
Fuel consumption	kg/h	1,35
Fuel autonomy	h	7
Thermostat control		analog or digital
Electric power	kW	0,2
Power supply	V	220-240*
Frequency	Hz	50
Rated current	A	0,85
Tank capacity	l	11
Product size (l x w x h)	mm	560 x 345 x 575
Box size (l x w x h)	mm	600 x 380 x 580
Net/gross weight	kg	19/21
Pallet	pcs	16

\* 110 V available

T Ambient 20°C	0,5 m	1 m	1,5 m
XL 61	110°C	50°C	20°C

